

FDBPF008 3.3~4.2GHz Low Insertion loss Band Pass Filter

Features

- 3.3-4.2GHz Whole Sub-6G operating band
- New circuit topology for excellent return loss and low insertion loss
- Novel Transmission zero control technology to enhance out-of-band rejection
- Passive integration on GaAs and DFN6 Package


Applications

- Wireless communication
- 5G NR, Sub-6G

Specification

Description	Value
Pass Band	3300~4200MHz
Insertion Loss	1.2dB(Max)@25°C
Return Loss	20dB(Min)
Out of band rejection	32dB @1710-1850 MHz 8dB @2400-2500 MHz 20dB @5850-5925 MHz 18dB @6600-8400 MHz 22dB @9900-12600 MHz
Input/output Impedance	50Ω
Dimension (Die)	1.0mm×0.5mm×0.725mm
Operating Temperature Range	-40~+85°C
Storage conditions	Temperature +5~+35°C
	Humidity 45~75% RH
Storage Period	12 months max

Electrical Performance

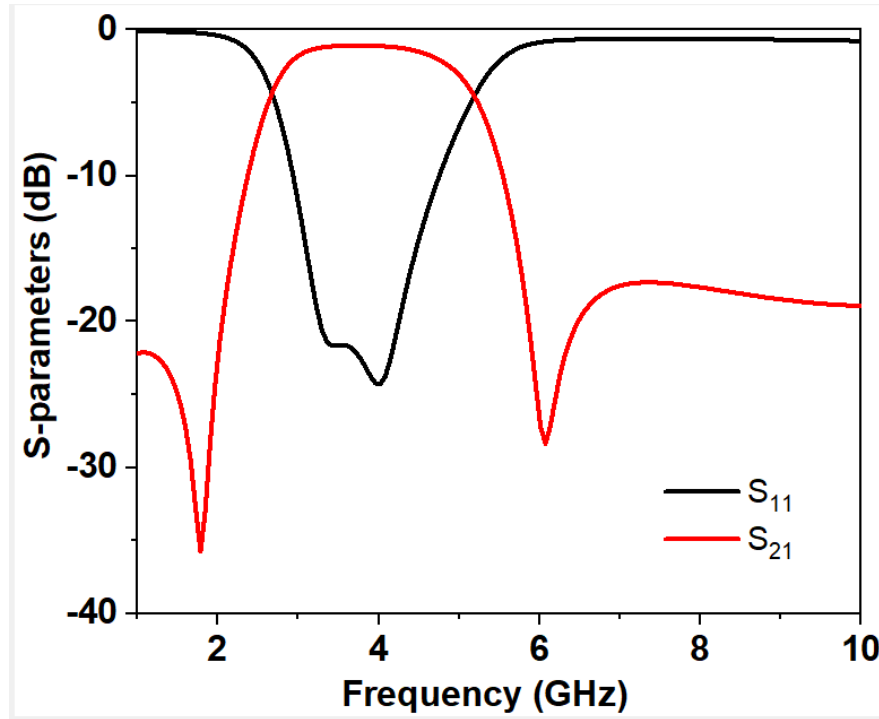

*Designed by UltraEM V202109, Faraday Dynamics, Inc., Hangzhou, Zhejiang, China, 2022.